

STUCCHI

POWDERS EXHAUST SYSTEMS



ST2-TF

VOLTAGE	230V 50Hz
CONTROL VOLTAGE	12 VOLT
SUCTION VOLUME	210 M ³ /h
SUCTION VACUUM	200 mbar
SUPPLY AIR PRESSURE	MAX 8 bar
VACUUM TURBINE	1.5 kW
NOISE	68 dBa
SIZES	500 X 1000 X 900 mm
WEIGHT	40 Kg

ST2-TF

**INDUSTRIAL VACUUM CLEANER EQUIPPED WITH WHEELS.
SOLID AND COMPACT SHAPE, MANUAL
AND AUTOMATIC FILTER CLEANING.
ELECTRIC AND PNEUMATIC AUTOMATISMS.
FLAT SURFACE, SUCTION HOSES AND ORBIT SANDERS,
ACCESSORY SHELVES, PAPER BOXES.
PRACTICAL AND COMPLETE, THIS PRODUCT IS A REAL MOVING
SANDING SYSTEM WITH VERY HIGH PERFORMANCES.**

**SELF CLEANING
FILTERS EACH
15 mins.**


**PROGRAMMABLE
ELECTRONIC BOARD**



**AUTOMATIC
SUCTION START**

**REMOVABLE DUST
CONTAINER BAG**

THREE-PHASE TURBINE

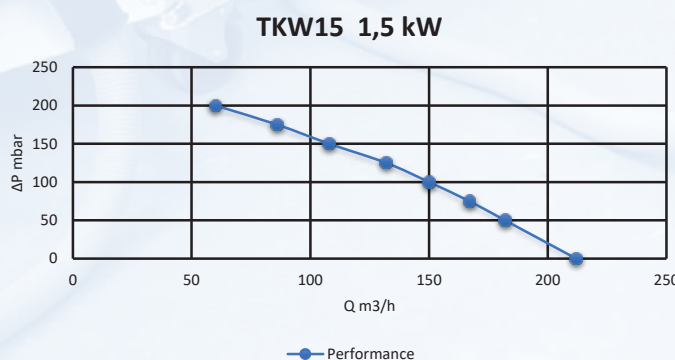

ST2-TF



To effectively clean the filters mounted on the dust extractor, a mechanical shaking cleaning system has been developed. The electronic board controls automatically a pneumatic piston which, by shaking the filter intensely, causes, to the dust deposited filter, to fall into the powder container, thus allowing the filter to run optimally.

Piston cleaning system is recommended for any type of application, because it improves significantly the filter cleaning compared to the "vibrating motor" or "air jet" versions.

To clean the filter with the vertical piston becomes mandatory when it comes to extract powder, even fine, which can quickly clog the filter and cause the engine fail.

The main advantage of this cleaning system is the greater efficiency of the filter shaking with a piston. A further advantage is the automatic cleaning, which eliminates the problem of remembering to clean it manually, so that the operator will not have this commitment.

Self-cleaning Filter Guaranteed for 5 years



SICERT

**No additional cost for the replacement of filters and bags.
Minimum maintainance time.**